

WOCA Oil Lacquer

- lacquer based on oil for the basic finish of wood surfaces



Preparing today for tomorrow



- Oil-based 1K-Lacquer, contains solvent
- Hard-wearing
- Also suitable for oiled floors
- Enhances the colour of the wood
- Certified by IBR

Product info

Container: 0,75 and 2,5 litre

Gloss levels: mat and silky-mat

Consumption: 8-10 m²/litre per application



Application area

Oil-Lacquer is used for wood floors in residential and non-residential areas for unfinished, lye treated and coloured parquet or for floors that have been treated with solvent-based lacquers. Very much suitable for the additional sealing of oiled floors.

Result

Oil-Lacquer generates an easy-to-care surface that enhances the wood naturally.

Gloss levels mat - silky mat.

Application

Oil-Lacquer is applied with a brush or a lacquer roller. Apply 2-3 times with 100-120 g/m².

Maintaining and cleaning

Maintenance cleaning with Lacquer Soap. Additional maintenance with Lacquer Care.

How to do...

- WOCA Oil Lacquer:
Lacquer for the basic finish of solid wood floors




1



2



3

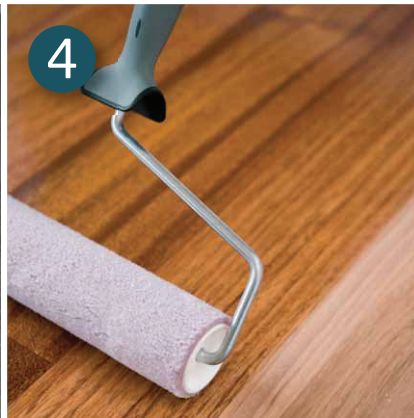

4

Tools

Sanding grit, sanding pad, brush or lacquer roller, lacquer-stirrer, lacquer-bowl.

Clean tools with turpentine.

Please notice!

- **Cannot be re-lacquered with a water-based lacquer.**
- **Risk of self-ignition! Due to the risk of self-ignition it is important that sanding dust and oil wetted cloths are soaked in water and disposed of in a tightly closed container after use.**

Oil Lacquer gives a very hard-wearing surface.

The product is quick-drying and easy to apply. Oil Lacquer is very suitable for wooden surfaces, e.g. floors, stair-cases, tables, shelves. Furthermore the product may be used for oiled floors.

1 Basic cleaning

The wood must be completely clean, dry and free from resin, grease, oil, wax, lime and cleaning residues. Use Wood Cleaner for the thorough cleaning.

2 Sanding

- of new wood surface:

Sand with sandpaper grit 120. Remove any sanding dust from the surface with a vacuum cleaner before applying the lacquer.

- of wood surface to be re-lacquered:

Remove loose chips and soap residues from the surface. Sand carefully with sandpaper grit 120. Remove any sanding dust from the surface with a vacuum cleaner before applying the lacquer.

- of surface with old oil lacquer too damaged to be repaired:

Lacquered surfaces which are severely damaged must be levelled and sanded to bare wood. Start the sanding with sand-paper grit 36. Continue with grit 60, 80, 100, and end with grit 120. Remove any sanding dust from the surface with a vacuum cleaner before applying the lacquer.

3 Preparation

Stir the lacquer carefully before and during use. Edges may advantageously be given a coat with a brush prior to the application of the large surface.

4 Lacquering

- **First application:**

Apply a thin coat of lacquer with brush or lacquer roller. Leave the lacquer to dry for approx. 6 hours. Make intermediate sanding with sandpaper grit 120 after the drying time of 6 hours. Remove any sanding dust from the surface with a vacuum cleaner before applying next coat.

- **Second application:**

Likewise apply a second thin lacquer coat with brush or lacquer roller. The lacquered surface may be used after 24 hours. The surface is completely hardened after 1 week.