

WOCA Advanced 2K Floor Lacquer

– Suitable for commercial areas



Easy and effective. *Naturally*



- Water based
- Fast drying
- NMP Free
- Suitable for commercial areas
- Highly efficient consumption
- “Black heel mark resistant”

Hardener:

- Free from Isocyanates

Product info

Container: 5 L

Gloss: 20 and 40

Consumption: 8-12 m²/L
depending on wood type



Application area

The lacquer is highly resistant to scratching and extremely hardwearing, as well as offering excellent adhesion to other types of lacquer. Areas of application include schools, sports halls, airports, offices, restaurants, dance floors, staircases, etc.

Result

This special Floor Lacquer has unique properties and offers advantages such as resistance to water and chemicals. It is black heel mark resistant, making it particularly suitable for commercial high traffic areas.

Application

Apply the Advanced 2K Floor Lacquer undiluted with a roller or brush.

Maintaining and cleaning

Maintenance cleaning with Lacquer Soap. Additional maintenance with Lacquer Care.

How to do...

– WOCA Advanced 2K Floor Lacquer




Easy and effective. *Naturally*



1



2

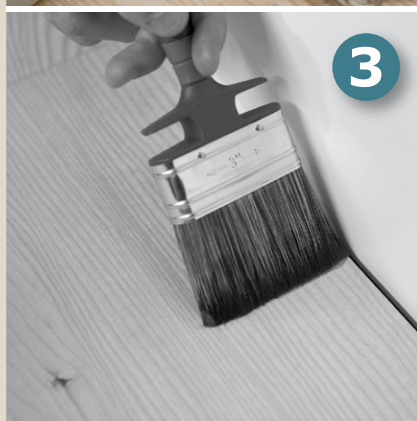

3



4

Tools

Sanding grid, sanding pad, brush or lacquer roller, lacquerstirrer, lacquerbowl.

Clean tools with water and soap.

Advanced 2K is a water based, 2-component floor lacquer that can be used on any wood surface, including oak. This special Floor Lacquer has unique properties and offers advantages such as resistance to water and chemicals. It is black heel mark resistant, making it particularly suitable for commercial high traffic areas. The Floor Lacquer is highly resistant to scratching and extremely hardwearing, as well as offering excellent adhesion to other types of lacquer. Areas of application include schools, sports halls, airports, offices, canteens, dance floors, staircases, etc.

Use:

Advanced 2K is a 2-component lacquer that is activated by adding the Advanced 2K Hardener into the Floor Lacquer. Advanced 2K Hardener comes in plastic bottle of 100 ml canisters half full. The content is filled up with water – lid put back on and mixture is shaken before being added to the Lacquer. It is vital to mix the hardener and Lacquer thoroughly by pouring the mixed hardener into the can of Lacquer and then shaking the can well (do not stir). The mixture should then be left to stand for 10 minutes to ensure that the hardener is activated before use.

Previous lacquered:

- 1 Wood that has been lacquered before must be cleaned with WOCA Wood Cleaner to remove dirt, grease, wax and soap residues.
- 2 Always sand surfaces with sanding paper grit 100.

Untreated floors:

Please study label on WOCA Floor-Primer!

- 3 Remove all traces of sanding dust with a vacuum cleaner. Untreated or newly sanded floors also have to be vacuumed thoroughly before lacquering. Apply the Advanced 2K Floor Lacquer undiluted with a roller or brush.
- 4 Allow to dry for approx. 90 minutes. (If floor has been primed with white or grey Floor-Primer, then sand after the 1st coat of Advanced 2K with a grit 120 or sanding pad). Remove all traces of sanding dust with a vacuum cleaner. Apply another coat of Advanced 2K Floor Lacquer.

Drying time:

The finished floor can be walked on with care after approx. 4 hours and light objects put back in the room after 24 hours. The freshly sealed floor will be ready for full use after about 8 days (laying rugs, etc.).